


Z Series Specifications

Z系列参数表

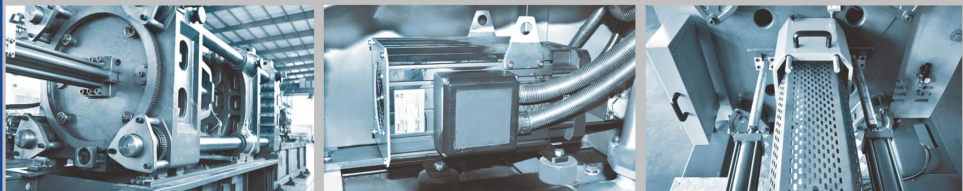


Z70 / Z110 / Z140 / Z170 / Z230 / Z270

项目	Item	单位	Z70			Z110				Z140			Z170			Z230			Z270		
注射装置	INJECTION UNIT		A	B	C	A	B	C	D	A	B	C	A	B	C	A	B	C	A	B	C
螺杆直径	Screw diameter	mm	26	30	32	32	35	38	42	38	42	45	42	45	50	45	50	55	50	55	60
理论注射容量	Shot volume(theoretical)	cm ³	69	92	104	137	163	192	235	226	277	318	311	357	441	397	490	593	530	641	763
注射重量	Injection weight(ps)	g	62.8	83	95	125	148	175	213	206	252	289	283	325	402	362	446	540	482	583	694
注射速率	Injection rate	g/s	55	73	83	74	89	105	128.1	94	115	132	138	160	196	124	154	186	187	227	270
注射压力	Injection pressure	MPa	227	170	150	260	219	186	152	208	171	148	203	177	143	207	168	138	205	169	142
螺杆转速	Screw speed	rpm	185			210				185			180			155			180		
锁模装置	CLAMPING UNIT																				
锁模力	Clamping force	kN	700			1100				1400			1700			2300			2700		
移模行程	Open stroke	mm	280			350				380			435			475			540		
拉杆间距(宽×高)	Space between tie bars(WxH)	mm	320×320			370×370				420×420			470×470			520×520			570×570		
最大模厚	Max.Mould height	mm	320			380				450			520			530			550		
最小模厚	Min.Mould height	mm	100			150				160			180			200			200		
顶出行程	Ejector stroke	mm	80			100				120			140			140			150		
顶出力	Ejector force	kN	28			38				50			50			70			70		
其他	OTHERS																				
最大油泵压力	Max.Pump pressure	MPa	16			16				16			16			16			16		
油泵电机功率(伺服)	Pump motor power	kW	10			14				14			18.2			18.2			36.7		
电热功率	Heating power	kW	6.3			7.5				10.2			11.2			14.8			16.8		
外形尺寸(长×宽×高)	Machine dimension(L×W×H)	m	3.79X1.16X1.73			4.4X1.27X1.90				4.48X1.33X1.9			5.04X1.43X2.12			5.68X1.50X2.14			5.90X1.60X2.25		
油箱容积	Oil tank cubage	L	150			230				270			300			300			380		
机器重量	Machine weight	t	2.5			3.4				4			6			7			8		
模板正面尺寸图	Platen dimensions																				
模板侧面尺寸图	Mould space dimensions																				

本公司保留对产品进行修改的权利, 规格如有变动, 恕不另行通知 (仅供参考) We reserve the right to make any product improvement or specifications change without prior notice.

Z Series Specifications Z系列参数表

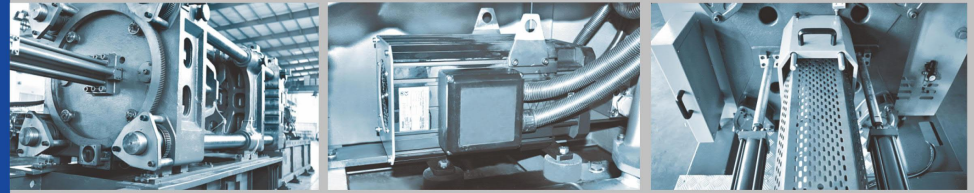


Z310 / Z360 / Z410 / Z460 / Z530 / Z650 / Z780

项目	Item	单位	Z310			Z360			Z410			Z460			Z530				Z650				Z780			
注射装置	INJECTION UNIT		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	D	A	B	C	D	A	B	C	D
螺杆直径	Screw diameter	mm	55	60	65	65	70	75	70	75	80	70	75	80	75	80	85	90	90	95	100	105	90	95	105	110
理论注射容量	Shot volume(theoretical)	cm³	700	834	978	1112	1289	1480	1500	1723	1960	1500	1723	1960	1811	2061	2326	2608	2735	3048	3377	3723	2990	3331	4070	4466
注射重量	Injection weight(ps)	g	637	759	890	1012	1175	1349	1365	1567	1784	1365	1567	1784	1648	1875	2117	2373	2489	2774	3073	3388	2721	3032	3703	4064
注射速率	Injection rate	g/s	223.5	266	312.2	337	368	422	335	384	437	344	395	449	386	442	499	560	552	612	679	748	574	640	781	858
注射压力	Injection pressure	MPa	200	168	143	195	170	148	199	173	152	199	173	152	191	168	148	132	184	165	149	135	195	175	143	130
螺杆转速	Screw speed	rpm	180			190			150			160			130				145				100			
锁模装置	CLAMPING UNIT																									
锁模力	Clamping force	kN	3100			3600			4100			4600			5300				6500				7800			
移模行程	Open stroke	mm	590			660			705			740			770				870				950			
拉杆间距(宽×高)	Space between tie bars(WxH)	mm	620×620			670×670			720×720			770×770			820×820				880×880				980×980			
最大模厚	Max.Mould height	mm	630			720			780			780			810				900				960			
最小模厚	Min.Mould height	mm	200			250			250			250			330				350				400			
顶出行程	Ejector stroke	mm	150			160			180			200			230				250				280			
顶出力	Ejector force	kN	70			70			90			110			150				150				210			
其他	OTHERS																									
最大油泵压力	Max.Pump pressure	MPa	16			16			16			16			16				16				16			
油泵电机功率 (伺服)	Pump motor power	kW	36.7			56			56			56			63				36.7+36.7				56+36.7			
电热功率	Heating power	kW	23.2			26.3			30.7			30.7			32.6				47.8				54.3			
外形尺寸(长x宽x高)	Machine dimension(LxWxH)	m	6.25*1.66*2.37			7.21*1.9*2.34			7.71*1.88*2.41			7.98*1.90*2.30			8.52*2.05*2.82				10.2*2.24*2.71				10.7*2.2*3.14			
油箱容积	Oil tank cubage	L	385			620			700			720			900				1100				1200			
机器重量	Machine weight	t	9			12.5			15.4			16			20				28				36			
模板正面尺寸图	Platen dimensions																									
模板侧面尺寸图	Mould space dimensions																									

本公司保留对产品进行修改的权利, 规格如有变动, 恕不另行通知 (仅供参考) We reserve the right to make any product improvement or specifications change without prior notice.

Z Series Specifications

Z系列参数表

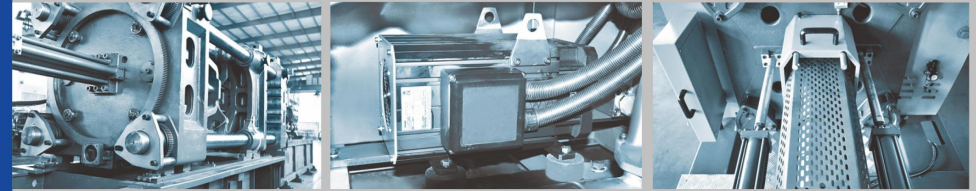

1100 / Z1300/ Z1800 / Z2200 / Z2800

项目	Item	单位	Z980			Z1100				Z1300				Z1500			Z1800				Z2200			Z2800						
注射装置	INJECTION UNIT		A	B	C	A	B	C	D	A	B	C	D	A	B	C	A	B	C	D	A	B	C	A	B	C				
螺杆直径	Screw diameter	mm	90	100	110	100	110	120	130	110	120	130	140	120	130	140	130	140	150	160	140	150	160	170	200	215				
理论注射容量	Shot volume(theoretical)	cm³	3147	3886	4702	4712	5702	6899	8348	5702	6899	8348	9236	7121	8257	9693	8760	10155	11660	13670	9683	11115	12647	19293	35154	43530				
注射重量	Injection weight(ps)	g	2864	3536	4279	4288	5189	6278	7597	5189	6278	7597	8405	6480	7605	8820	7971	9240	10600	12440	8812	10115	11509	17557	31990	39612				
注射速率	Injection rate	g/s	565	697	843	660	798	966	1169	798	966	1169	1293	943	1107	1284	1172	1360	1560	1776	1262	1448	1648	1779	2095	2121				
注射压力	Injection pressure	MPa	215	174	144	207	171	144	123	204	171	146	126	192	164	141	184	159	138	122	163	142	125	161	137	135				
螺杆转速	Screw speed	rpm	97			100				100				103			70				75			60			50		45	
锁模装置	CLAMPING UNIT																													
锁模力	Clamping force	kN	9800			11000				13000				1500			18000				22000			28000						
移模行程	Open stroke	mm	1120			1250				1420				1500			1600				1800			2000						
拉杆间距(宽×高)	Space between tie bars(WxH)	mm	1080×1080			1170×1170				1280×1280				1480*1360			1580X1480				1750X1600			1900×1750						
最大模厚	Max.Mould height	mm	1080			1220				1350				1500			1600				1700			1900						
最小模厚	Min.Mould height	mm	450			500				600				700			650				780			1000						
顶出行程	Ejector stroke	mm	325			325				325				375			400				400			450						
顶出力	Ejector force	kN	246			245				245				282			407				430			430						
其他	OTHERS																													
最大油泵压力	Max.Pump pressure	MPa	16			16				16				16			16				16			16						
油泵电机功率 (伺服)	Pump motor power	kW	56+56			36.7+36.7+36.7				36.7+36.7+56				168			56+56+56				45+37X5			55+55+55						
电热功率	Heating power	kW	63.1			68.8				68.8				85.6			110.7				114.05			171.7						
外形尺寸(长x宽x高)	Machine dimension(LxWxH)	m	11.43×2.4×3.14			12.4*2.67*3.3				13.1*2.8*3.3				14.1*3.07*3.5			16.35*3.5*3.58				15.6X3.6X5.3			18.9×3.92×5.2						
油箱容积	Oil tank cubage	L	1200			1600				2100				1800			3000				2970			4420						
机器重量	Machine weight	t	43			50				60				80			120				137			190						
模板正面尺寸图	Platen dimensions																													
模板侧面尺寸图	Mould space dimensions																													

本公司保留对产品进行修改的权利, 规格如有变动, 恕不另行通知 (仅供参考) We reserve the right to make any product improvement or specifications change without prior notice.