






## 分离式真空填料机/SEPARATE VACUUM FILLING MACHINE




### ■ 本机特点/The machine features

- 微电脑控制，操作简易，控制精确，并有多项报警指示灯
- 马达保护装置，可增长其使用寿命
- 缺料警报，可主动通知客户排除状况
- 独立滤清器装置，方便清除积尘；滤清器检视窗，方便客户查看滤清器使用状况，并定期清洗
- Microcomputer control, simple operation, control precision, and has a number of alarm light
- Motor protection device, can increase its service life
- Lack of material alerts, can take the initiative to inform the customer to exclude the situation
- Separate filter device for easy removal of dust; filter view window for customers to view the filter usage and regular cleaning

### ■ 外形尺寸/External Size



SAL-800G/800G2(主机)



SAL-330/360E

### ■ 规格表/Specifications

机型 Model	马达 Motor		输送能力 Conveying (kg/hr)	料斗量 Hopper Capa (L)	输料管内径 Diameter of Conveying Pipe (mm)	外型尺寸 External Size (mm)		重量 Weight (kg)
	形式 Type	规格 Specificatio				主体Main Body HxWxD	料斗 Material Hopper HxWxD	
SAL-300	碳刷式 Carbon Brush Type	1100w	300	6	Φ 38	550x400x350		12
SAL-400	感应式 Inductive Type	1HP	400	6	Φ 38	800x450x450		25
SAL-700G	碳刷式 Carbon Brush Type	1100w	300	6	38	550x450x300	450x350x250	20 5
SAL-800G	感应式 Inductive Type	2HP	300	6	38	650x450x400	450x350x250	45 5
SAL-800G2	感应式 Inductive Type	3HP	580	12	38	650x450x400	500x450x300	55 9
SAL-3.5HP	感应式 Inductive Type	3.5HP	780	30	51	1400x500x500	800x450x300	80 15
SAL-5.0HP	感应式 Inductive Type	5HP	900	30	51	1400x500x500	800x450x300	85 15
SAL-900G	感应式 Inductive Type	1.5HP	300	6Lx6L	38	750x450x400	450x350x250	50 5
SAL-900G2	感应式 Inductive Type	2HP	580	12Lx12L	38	750x450x400	500x450x300	60 9

产品规格若有变更,恕不另行通知.Please excuse for not note if some specifications of products are changed.

**Note 注:** 1) 输送能力测试条件为: 堆积密度约0.65kg/L, 直径为3-5mm塑胶原料颗粒, 以垂直高度4m, 水平距离5m为测试标准所得

2) 电器电压规格除SAL-300/700G为:1<sub>~</sub>, 220VAC, 50Hz, 其余机种皆为:3<sub>~</sub>, 380VAC, 50Hz

1. Transmission capacity test conditions as follows: Bulk density is about 0.65 kg/L, diameter of 3 to 5 mm particles of plastic materials, With vertical height of 4 m, horizontal distance of 5 m for testing standards.

2. Electrical voltage specification in addition to SAL - 300/700 - G as follows: 1<sub>~</sub>, 220VAC, 50Hz, The rest of the models are as follows 3<sub>~</sub>, 380VAC, 50Hz

## 直结式真空填料机/STRAIGHT TYPE VACUUM PACKING MACHINE



### ■ 本机特点/The machine features


- 不锈钢料斗，马达过载保护装置
- SAL-330E/360E装备对射式光电开关,适合直接安装于成型机入料口
- Stainless steel hopper, the motor overload protection device
- SAL-330E/360E equipped with correlation photoelectric switch, Suitable directly installed on the machine into mouth



## 中央原料处理系统/CENTRAL MATERIAL HANDLING SYSTEM

助您提高效益,提升产品质量,满足市场日益竞争的需求,根据您的需要,玖野将为您提供个性化的原料处理方案,以优化产品生产流程。

Help you improve efficiency, improve product quality, meet the increasingly competitive demand of the market, According to your needs, Jiuye will provide you with personalized materials processing solutions to optimize the product flow.

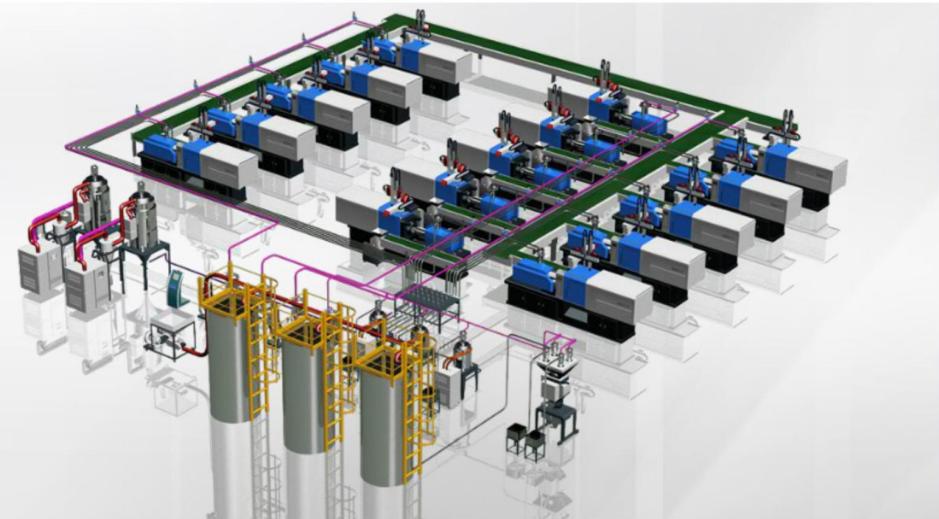

料斗干燥机  
Hopper Dryer



计量混合  
Metering mixing



除湿干燥三机一体  
Dehumidification, drying,  
integration of three machines



输送 Transportation

