

Rev.	Revision Record	Date
1 版	First Sample	2017-02-06


DIMENSION	TOLERANCE
Cover Glass Outline	±0.50
Sensor Glass Outline	±0.50
Screen Printing Outline	±0.50
Screen Printing Location	±0.50
FFC Outline	±0.20
FFC Location	±2.00
Chamber	±0.05
Radius	±0.10
Angle	±1.0°

STACK UP (堆叠结构)

CG (5.00±0.20 mm)
LOCA (0.20±0.05 mm)
Sensor (1.80±0.05 mm)

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

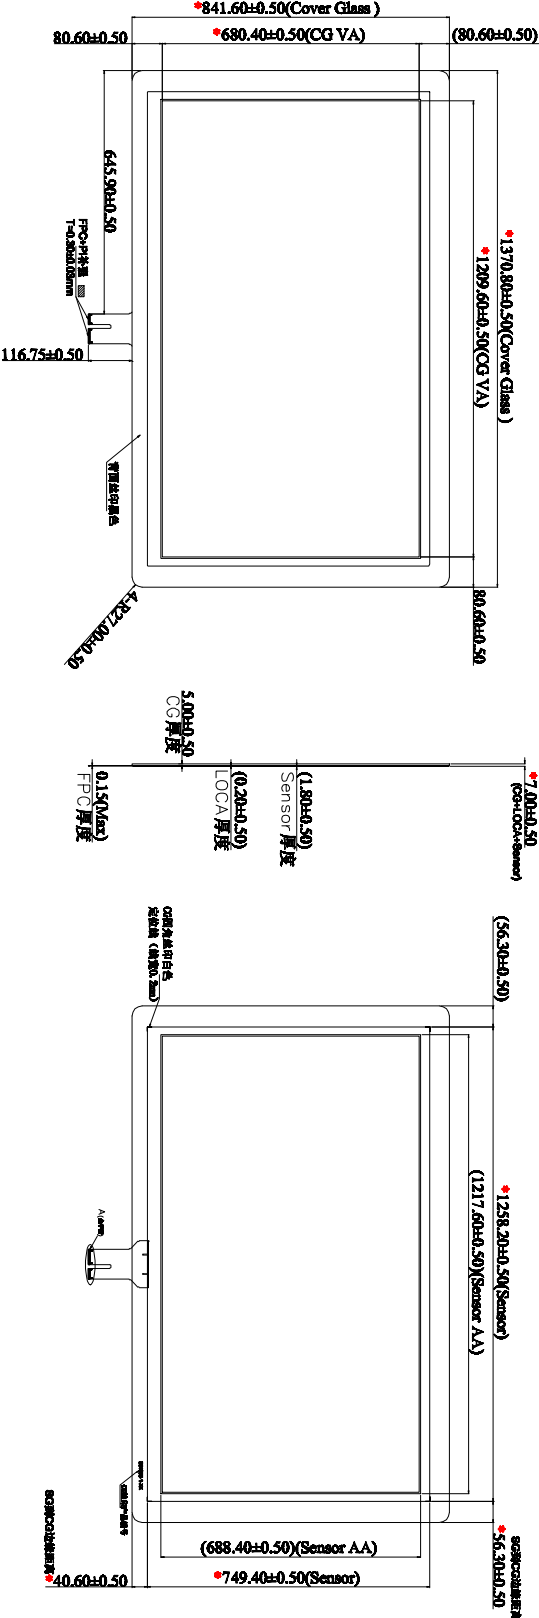


Front View

Side View

Back View

Note:

- 1.结构: Cover Glass(黑色)+LOCA+Sensor;
- 2.工作温度: 45~85 %RH;
- 3.工作温度: -20°C~70°C;
- 4.视窗区透射率: ≥85%; 雾度≤1%;
- 5.CG做物理强化, 表面硬度: ≥6H;
- 6.带"mm"为重点管控尺寸, 带"()"为参照尺寸;
- 7.以标注的公差为主, 未标注的公差请参考左上角公差表;
- 8.所有使用的材料必须符合 RoHS 要求;



绿触科技
GreenTouch

Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-CTP-P43A-1(S54855)	Size	5.5"	Ratio	16:9
Structure	G+G	Unit	mm	Scale	1:1
Design	李俊	Date	2017.02.06	Page	1/1
Check	付作书	Date	2017.02.06	Version	A/0
Release	汪燕	Date	2017.02.06		