

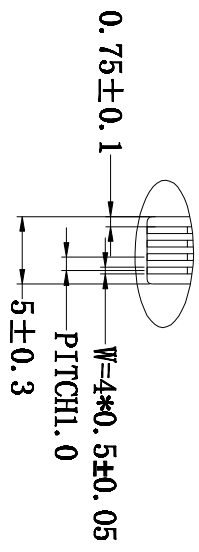



版本	变更原因	日期	姓名

DetailA:

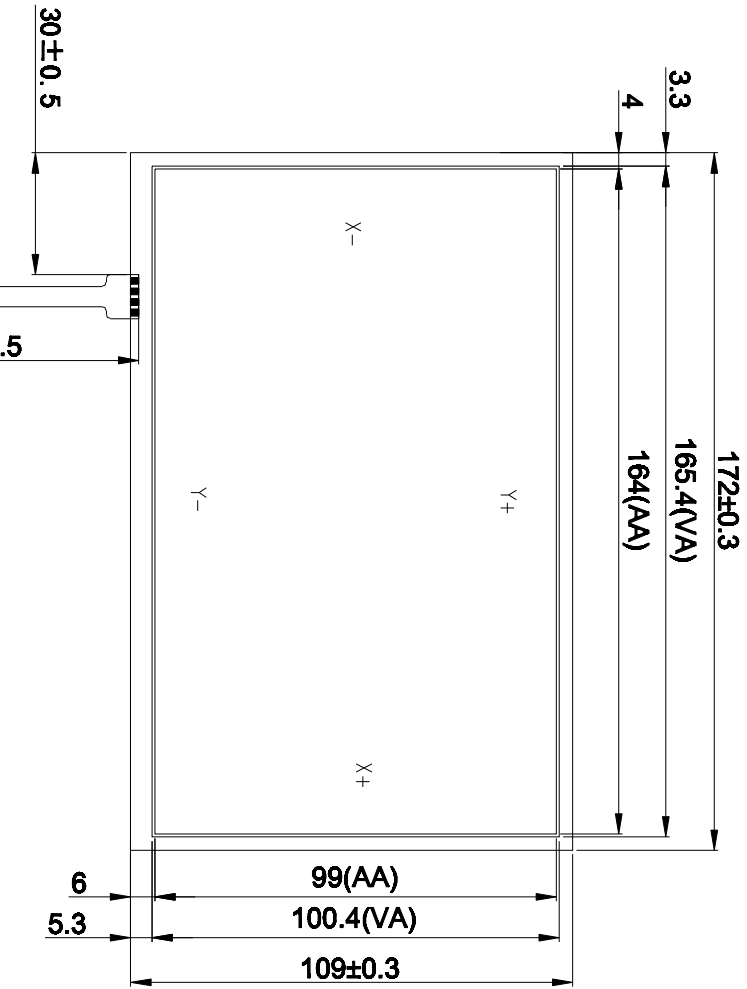

逻辑:



- Notes:
- 1.Type:Film to Glass
  - 2.Operating Voltage:≤10V
  - 3.Operation Temperature:-10℃~60℃  
Storage Temperature:-20℃~70℃
  - 4.Life Time:1,000,000 times
  - 5.Connect Material:FPC
  - 6.Response Time:≤10ms
  - 7.Linearity:≤1.5%
  - 8.Transmittance:≥75%
  - 9.Surface Hardness:≥3H(pencil)
  - 10.Operation force:60g~150g
  - 11.Resistance:X:447Ω-1093Ω Y:163Ω-398Ω

TOLERANCES (UNLESS OTHERWISE STATED)

DECIMALS	ANGLES
>20.00MM	±2.00MM
10.00 - 20.00MM	±1.20MM
5.00 - 10.00MM	±0.50MM
2.00 - 5.00MM	±0.20MM
<2.00MM	±0.10MM



Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-4W-76x-1	Size	7.5"	Ratio	16:9
Structure	G+T	Unit	mm	Scale	1:1
Design	李俊	Date	2017.4.28	Page	1/1
Check	付行书	Date	2017.4.28	Version	A0
Release	汪琳	Date	2017.4.28		