



Sunuprise Technology Ltd

DC-DC isolation transformer



Part Number: S06E41

R0


- 8mm minimum creepage & clearance distance between PRI & SEC.
- Operating temperature range: -40°C to +125°C.
- Storage temperature range: -40°C to +125°C.

Electrical Specifications @ 25°C

PARAMETER	TEST CONDITIONS	VALUE
DCR	1-3 @20°C	0.4Ω MAX.
DCR	6-4 @20°C	0.6Ω MAX.
INDUCTANCE	1-3 100KHz, 0.1Vrms	152μH MIN.
URNS RATIO	6-4:1-3	2.57:1 ± 5%
INSULATION TEST VOLTAGE		5000VAC 1MINUTE

·Schematics:

Mechanicals:

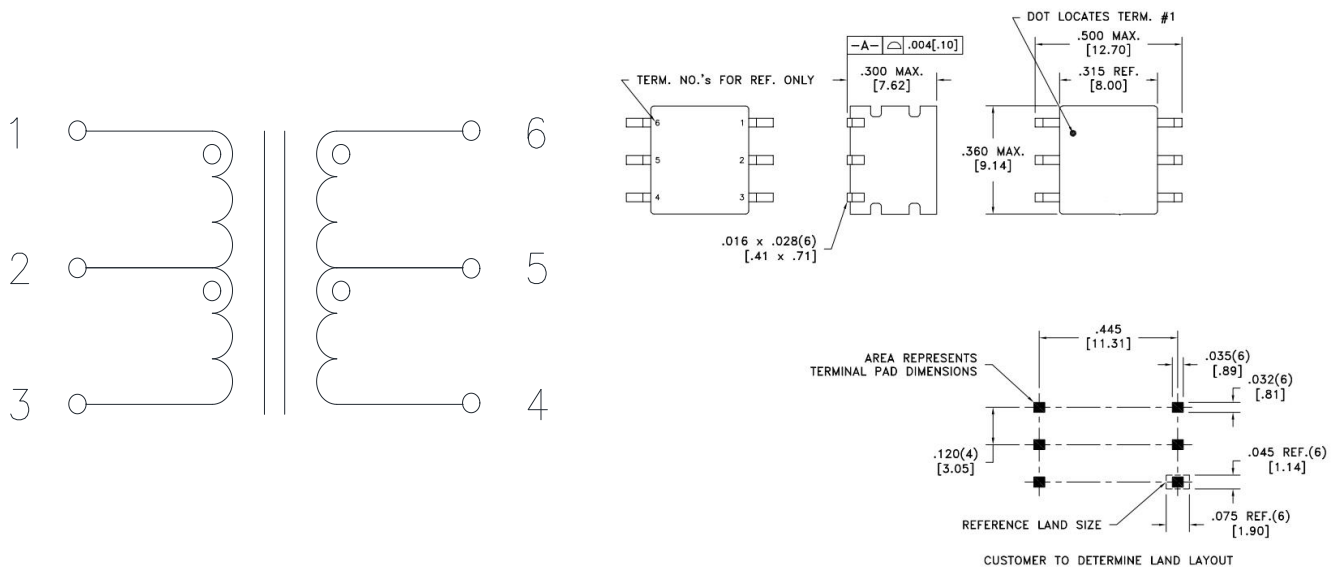

R0

Tel :
+8618508164900
+8617738749515


E-mail :
sp@sunuprise.com
sprskj@sunuprise.com




sunuprise

Sunuprise Technology Ltd

PACKING INFORMATION

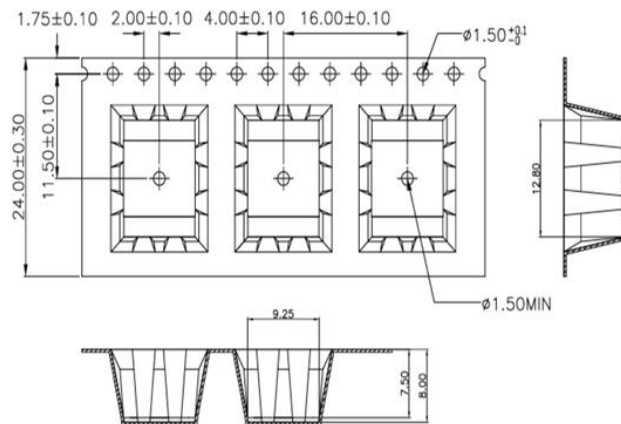


REEL MECHANICAL DIMENSION

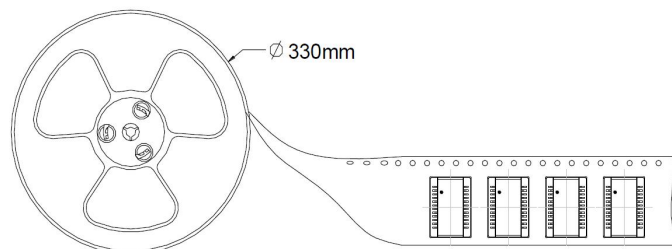

INNER CARTON:340mm(L) × 340mm(W) × 110mm(H)

EXPORT CARTON:360mm(L) × 360mm(W) × 250mm(H)

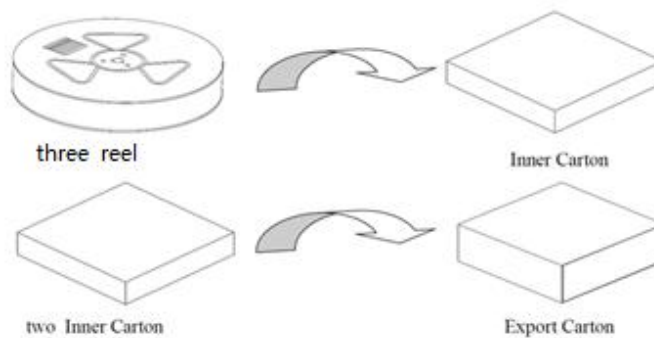

Package Quantity:

One Reel=500Pcs

One Inner Carton=500*3=1500Pcs

One Export Carton=1500*2=3000Pcs



Tel :
+8618508164900
+8617738749515

E-mail :
sp@sunuprise.com
sprskj@sunuprise.com