




版本	变更原因	日期	姓名

Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage: $\leq 10V$
- 3.Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
- 4.Life Time:1,000,000 times
- 5.Connect Material:FPC
- 6.Response Time: $\leq 10ms$
- 7.Linearity: $\leq 1.5\%$
- 8.Transmittance: $\geq 75\%$
- 9.Surface Hardness: $\geq 3H$ (pencil)
- 10.Operation force: $60g \sim 150g$
- 11.Resistance:X:203 Ω -495 Ω Y:360 Ω -880 Ω

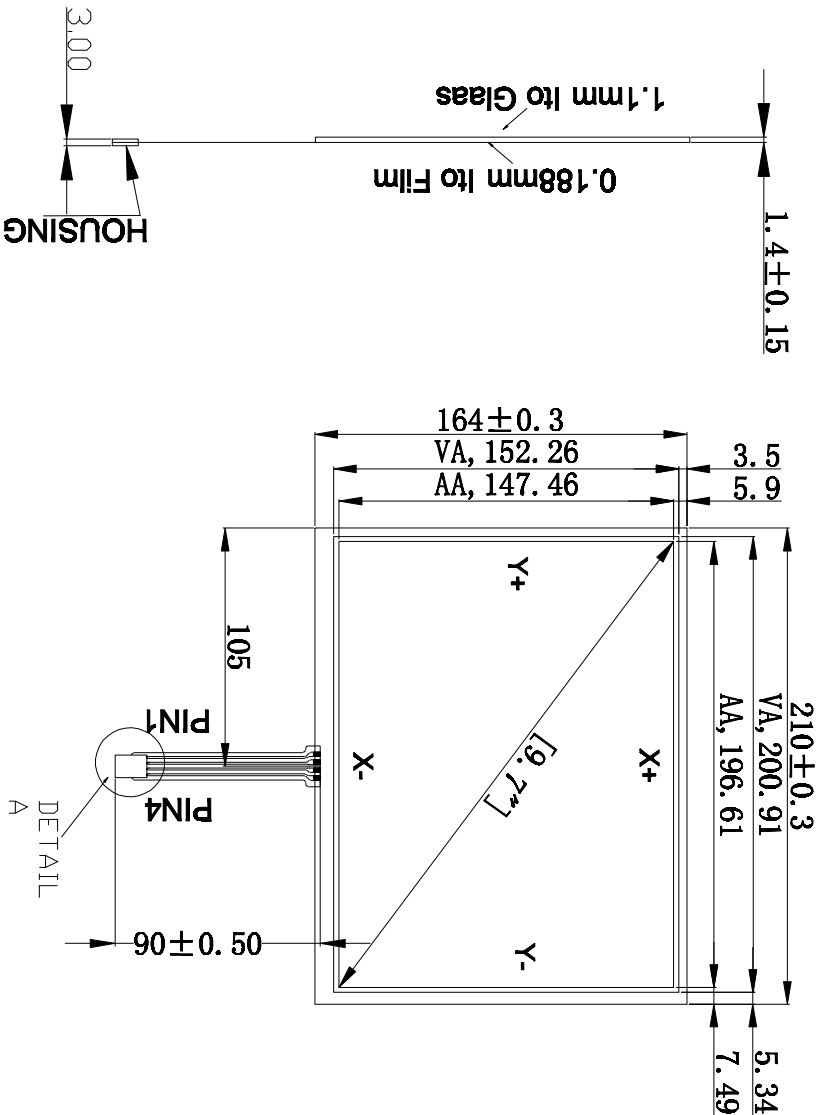

PIN #	Assignment
1	Y+
2	X-
3	Y-
4	X+



GreenTouch

TOLEANCES (UNLESS OTHERWISE STATED)
DECIMALS FRACTIONS ANGLES

>200MM	±2.00MM	±0.075°
180°- X <200MM	±1.20MM	
120°- X <160MM	±0.80MM	
80°- X <120MM	±0.50MM	
40°- X <80MM	±0.40MM	
120°- X <40MM	±0.30MM	
30°- X <120MM	±0.30MM	
<30MM	±0.10MM	

Model No.: GT-41W-9.7A-1		Size	9.7"	Ratio	4:3
Structure	G+T	Unit	mm	Scale	1:1
Design	李俊	Date	2015.5.5	Page	1/1
Check	付作书	Date	2015.5.5	Version	A0
Release	汪燕	Date	2015.5.5		

Shenzhen GreenTouch Technology Co.,Ltd