
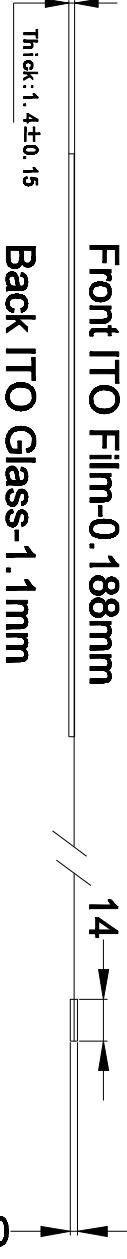


PIN ASSIGNMENT	
PIN #	DESIGNATION
1	LL
2	LR
3	SENSE
4	UL
5	UR

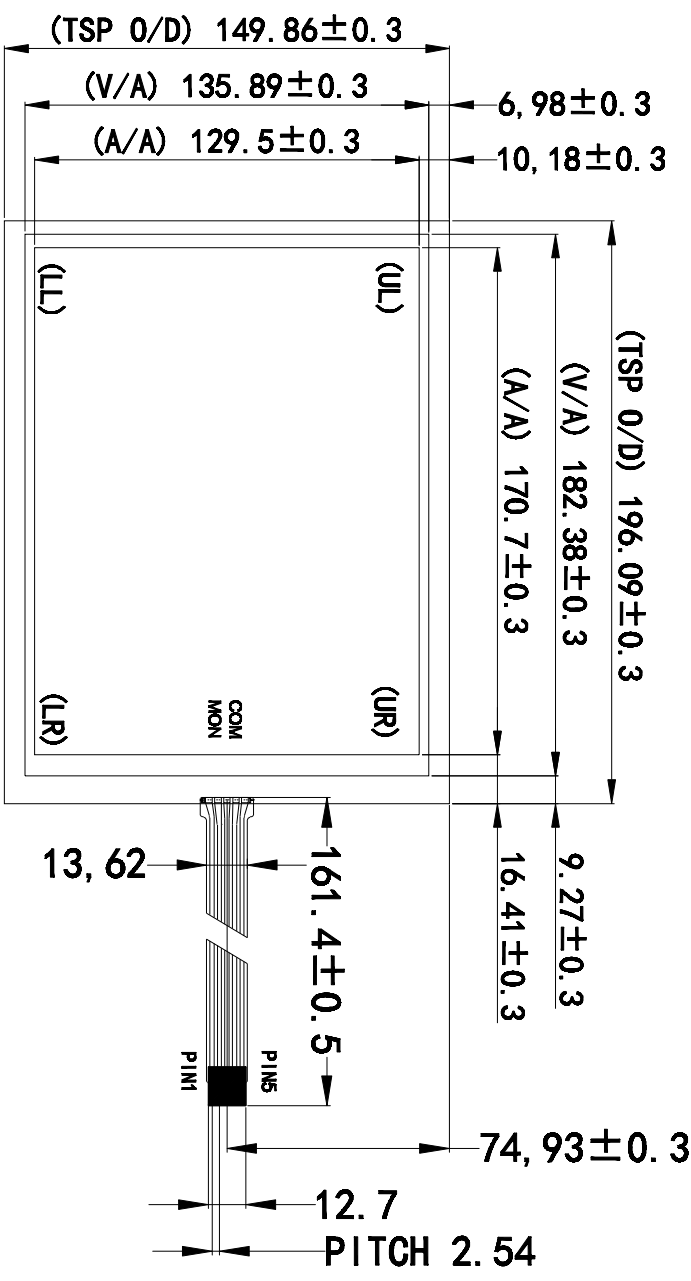

- Notes:
1. Type: Film to Glass
 2. Operating Voltage: $\leq 10V$
 3. Operating Temperature: $-20^{\circ}C \sim -65^{\circ}C$
 4. Life Time: 1,000,000 times
 5. Storage Temperature: $-30^{\circ}C \sim -70^{\circ}C$
 6. Connect Material: FPC
 7. Linearity: $\leq 1.5\%$
 8. Response Time: $\leq 10ms$
 9. Surface Hardness: $\geq 3H$ (pencil)
 10. Operation Force: $50g \sim 150g$

11. Resistance: $500 < PIN1, PIN2 < 2500$
 $500 < PIN2, PIN5 < 2500$
 $500 < PIN4, PIN5 < 2500$
 $500 < PIN4, PIN1 < 2500$

TOLERANCES
(UNLESS OTHERWISE STATED)
DIMENSIONS ANGLES ±0.5%

1800- X < 2500MM	±0.25MM
1200- X < 1800MM	±0.50MM
800- X < 1200MM	±0.50MM
400- X < 800MM	±0.40MM
120- X < 400MM	±0.50MM
30- X < 120MM	±0.50MM
< 30MM	±0.10MM

绿域触控
GreenTouch Technology Co., Ltd

Model No.:	GT-S104A-1	Size	8.4"	Ratio	4:3
Structure	G+G	Unit	mm	Scale	1:1
Design	张	Date	2006.11.3	Page	1/1
Check	张	Date	2006.11.3	Version	A.0
Release	张	Date	2006.11.3		