


版本	变更原因	日期	姓名





Detail A

PIN #	Assignment
1	X-
2	Y-
3	X+
4	Y+

Notes:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 75\%$
9. Surface Hardness: $\geq 3H$ (pencil)
10. Operation force: $60g \sim 150g$
11. Resistance: X: $450\Omega - 1100\Omega$ Y: $162\Omega - 396\Omega$

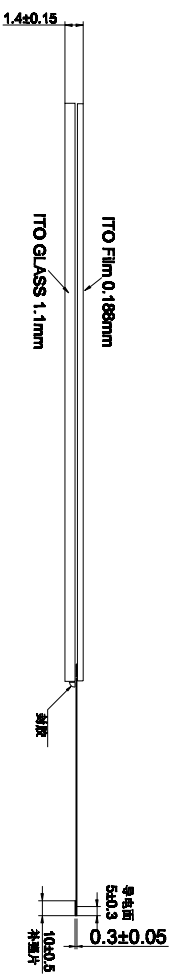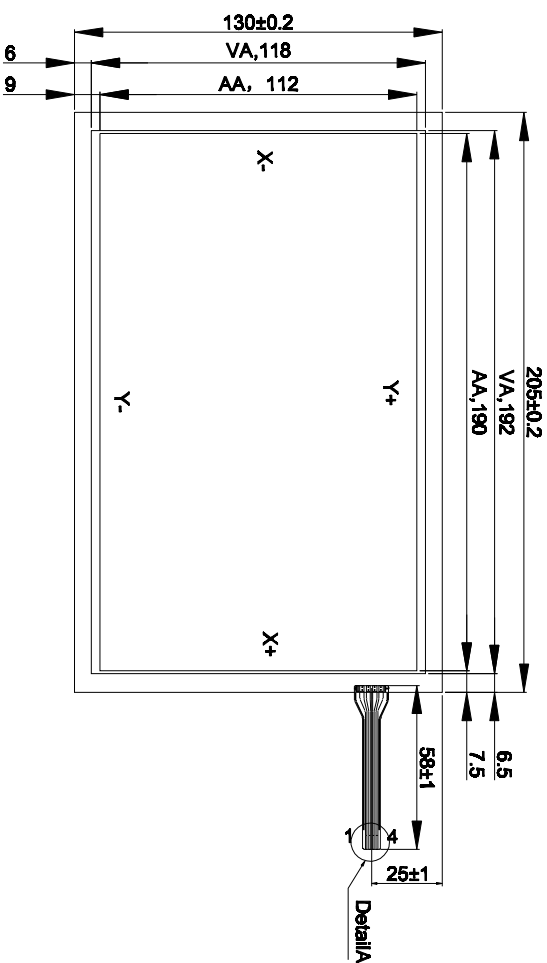

TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	RADIUS
1800- X $\leq 250MM$	$\pm 2.0MM$	$\pm 0.2MM$
1200- X $\leq 1800MM$	$\pm 0.2MM$	$\pm 0.2MM$
800- X $\leq 1200MM$	$\pm 0.2MM$	$\pm 0.2MM$
400- X $\leq 800MM$	$\pm 0.40MM$	$\pm 0.40MM$
120- X $\leq 400MM$	$\pm 0.20MM$	$\pm 0.20MM$
30- X $\leq 120MM$	$\pm 0.10MM$	$\pm 0.10MM$

绿触科技
GreenTouch

Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-4H-47A-1	Size	8.7"	Ratio	16:9
Structure	Qt-F	Unit	mm	Scale	1:1
Design	字模	Date	2017.1.16	Page	1/1
Check	付作书	Date	2017.1.16	Version	A0
Release	邓耀廷	Date	2017.1.16		