

Product Characteristics

- ◆ Input voltage range: 180V-375V
- ◆ Output voltage range: 75% -110% Vout
- ◆ Efficiency $\geq 84\%$
- ◆ Over-voltage, over-current, short-circuit and over-temperature protection
- ◆ Interior patch design
- ◆ International standard pin mode
- ◆ Three years warranty period



Product Overview

The power module of this model is 180V-375V range input, with a maximum power of 150W and an efficiency of 84%, with input undervoltage and output overvoltage Output overcurrent, output short circuit and over-temperature protection and other protection functions;

Application

The power supply uses an advanced control topology circuit, with advanced power Processing control and packaging technology, with high efficiency, high power density Degree, low noise and other advantages; with input overvoltage protection, output Overcurrent protection, over-temperature protection and other functions;

Absolute rating	Metric	Unit
Voltage between the + IN and the-IN	0.5~410	V
Voltage between the PC and the-IN	0.5~7.0	V
Voltage between PR and-IN	0.5~7.0	V
Voltage between SC and-OUT	0.5~1.5	V
The + OUT and the-OUT voltage	0.5~4.7	V

Product Naming

CFMV	300	B	03	X	150	B	-	
Changfeng MV series standard brick power supply	Input Voltage 300:180-375V	A:Full brick B:1/2 brick C:1/4 brick	Out Voltage 03:3.3V	M : Tc :-55~100℃ Ts :-65~125℃ H: Tc :-40~100℃ Ts :-55~125℃ T: Tc :-40~100℃ Ts :-40~100℃	Output Power 150:150W	B:Standard version		Default: Non-domestic G: National production

Input Characteristic

Parameter	Least value	Typical value	Crest value	Unit	Working conditions
No-load state input power consumption		3	4	W	Tc=25℃
Disable the state input power consumption		2	4.5	W	Vpc≤2.3V
Input surge voltage			400	V	Tc=25℃, 100ms, the full load
Input underpressure	147.4	158	178.2	V	The full load
Input overpressure	378	400	420	V	Carrying idler


Output Characteristic

Parameter	Least value	Typical value	Crest value	Unit	Working conditions
Output current			45.45	A	
Output voltage	3.267	3.30	3.333	V	Tc=25℃, The full load
Winple and noise voltage		100	200	mV	Bandwidth Bw = 20 MHz, The full load
Voltage regulation		0.05	0.2	%	Vi: 180V-300V, 300V-375V, The full load
Load Regulation		0.05	0.2	%	Carrying idler~The full load
Temperature coefficient			0.02	%/℃	The full load
Output voltage regulation capability	75		110	%	The full load
Output voltage protection point	4.14		4.46	V	Tc=25℃, carrying idler
Output current limiting protection point	46.4		63.7	A	
Short-circuit current	31.8		63.7	A	Tc=25℃, Vo<250mV
Dynamics					
Peak deviation		2	5	%	50% -100% -50% load step Rate of change of the output current: 1A / μ S
Recovery time		100	200	μs	
Operating voltage of the PC end	5.50	6.00	6.00	V	Tc=25℃, Ipc=1.0mA, The full load
The PC terminal working current	2.5	2.2	4.5	mA	Tc=25℃, Vpc=5.5V, The full load
The PC terminal has a prohibited voltage	2.3	1.8	2.9	V	The full load
The PC terminal alarm voltage	0		0.5	V	Each protection function
PC terminal on output delay		5	7	ms	The full load
The PR output voltage amplitude	5.0		6.5	V	Tc=25℃, The full load
PR drive capability	6			A	Tc=25℃, No buffer amplification circuit
SC reference voltage	1.21	1.23	1.25	V	
SC alarm voltage			0.5	V	Each protection function
Efficiency	84			%	Tc=25℃, The full load

Isolation Characteristics

Parameter	Least value	Unit	Working conditions
Insulation and pressure resistance			
Enter to output	3000	V _{AC}	60s, T _c =25℃, The leakage current is less than 3 mA
Input into the shell	1500	V _{AC}	60s, T _c =25℃, The leakage current is less than 1 mA
Output to shell	500	V _{AC}	60s, T _c =25℃, The leakage current is less than 1 mA
Insulation resistance			
Enter to output	200	MΩ	T _c =25℃, 500V _{DC} test
Input into the shell	200	MΩ	T _c =25℃, 500V _{DC} test
Output to shell	200	MΩ	T _c =25℃, 500V _{DC} test

Structural Drawings

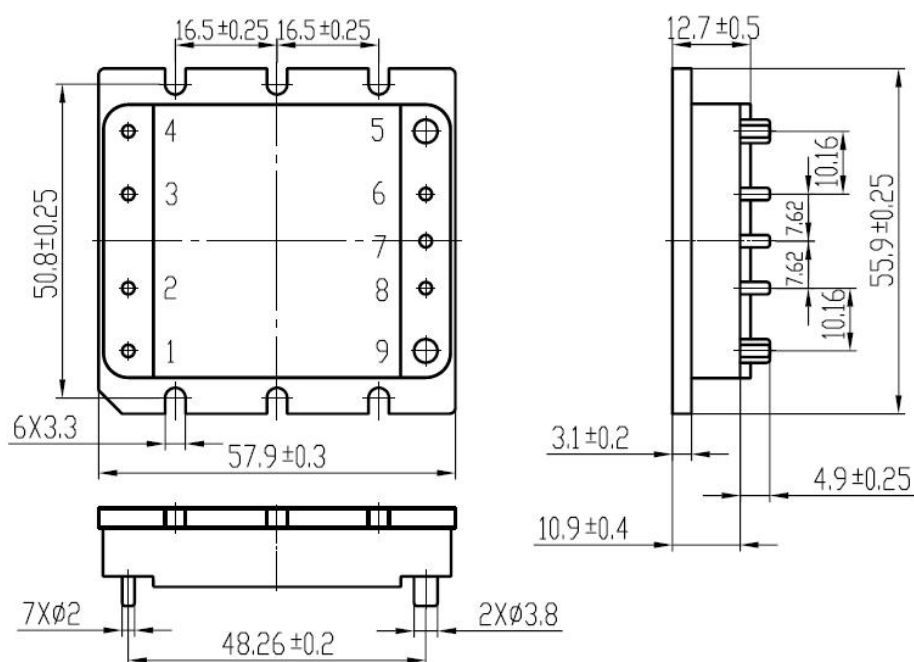

Pipe Foot Definition

Pin	Symbol	Function	Pin	Symbol	Function
1	+IN	Enter the positive end	5	-OUT	Output the negative end
2	PC	The original edge control end	6	-S	Negative induction compensation end
3	PR	Parallel end	7	SC	Side control end
4	-IN	Enter the negative end	8	+S	Positive induction compensation end
			9	+OUT	Output the positive end