


Product Characteristics

- ◆ Input voltage range: 180V-375V
- ◆ Output voltage range: 75%-110%Vout
- ◆ Efficiency≥89%
- ◆ Over-voltage, over-current, short-circuit and over-temperature protection
- ◆ Interior patch design
- ◆ International standard pin mode
- ◆ Three years warranty period

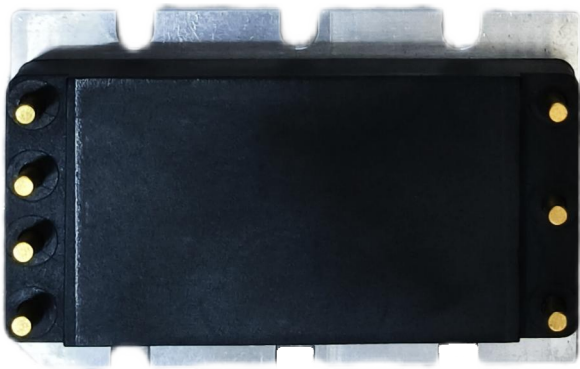

Product Overview

The power module of this model is 180V-375V range input, with a maximum power of 150W and an efficiency of 89%, with input undervoltage and output overvoltage Output overcurrent, output short circuit and over-temperature protection and other protection functions;

Application

The power supply uses an advanced control topology circuit, with advanced power Processing control and packaging technology, with high efficiency, high power densit Degree, low noise and other advantages; with input overvoltage protect ion, output Overcurrent protection, over-tempera ture protection and other functions;

Absolute Rating	Metric	Unit
Voltage between the + IN and the-IN	0.5~410	V
Voltage between the PC and the-IN	0.5~7.0	V
Voltage between PR and-IN	0.5~7.0	V
Voltage between SC and-OUT	0.5~1.5	V
The + OUT and the-OUT voltage	0.5~31.7	V
	-55~100	℃

Product Naming

CFMV	300	C	24	X	150	B	-	
Changfeng MV series standard brick power supply	Input Voltage 300:180-375V	A:full brick B:1/2 brick C:1/4 brick	Out Voltage 24: 24V	M : Tc :-55~100℃ Ts :-65~125℃ H: Tc :-40~100℃ Ts :-55~125℃ T: Tc :-40~100℃ Ts :-40~100℃	Out Voltage 150: 150W	B:Standard version		Default: non-domestic G: National production

Input Characteristic

Parameter	Least Value	Typical Value	Crest Value	Unit	Working Conditions
No-load state input power consumption		4	7.5	W	Tc=25℃
Disable the state input power consumption		2	3.5	W	Vpc≤2.3V
Input surge voltage			400	V	Tc=25℃, 100ms, the full load
Input underpressure	148	158	179	V	The full load
Input overpressure	378	400	420	V	Carrying idler


Output Characteristic

Parameter	Least Value	Typical Value	Crest Value	Unit	Working Conditions
Output current	0		6.25	A	
Output voltage	23.76	24.00	24.24	V	Tc=25℃, The full load
Windle and noise voltage		200	300	mV	Bandwidth Bw = 20 MHz, The full load
Voltage regulation		0.05	0.2	%	Vin: 180V-300V, 300V-375V, The full load
Load Regulation		0.05	0.2	%	Carrying idler~The full load
Temperature coefficient			0.02	%/℃	The full load
Output voltage regulation capability	75		110	%	The full load
Output voltage protection point	27.1		29.1	V	Tc=25℃, carrying idler
Output current limiting protection point	6.37		8.44	A	
Short-circuit current	3.5		8.15	A	Tc=25℃, Vo<250mV
Dynamics					
Peak deviation		2	5	%	50% -100% -50% load step Rate of change of the output current: 1A / μ S
Recovery time		100	200	μs	
Operating voltage of the PC end	5.50		6.00	V	Tc=25℃, Ipc=1.0mA, The full load
The PC terminal working current	2.5		4.5	mA	Tc=25℃, Vpc=5.5V, The full load
The PC terminal has a prohibited voltage	2.3		2.9	V	The full load
The PC terminal alarm voltage	0		0.5	V	Each protection function
PC terminal on output delay		5	7	ms	The full load
The PR output voltage amplitude	5.0		6.5	V	Tc=25℃, The full load
PR drive capability	6			A	Tc=25℃, No buffer amplification circuit
SC reference voltage	1.21	1.23	1.25	V	
SC alarm voltage			0.5	V	Each protection function
Efficiency	89			%	Tc=25℃, The full load

Isolation Characteristics

Parameter	Least Value	Unit	Working Conditions
Insulation and pressure resistance			
Enter to output	3000	V _{AC}	60s, T _c =25℃, The leakage current is less than 3 mA
Input into the shell	1500	V _{AC}	60s, T _c =25℃, The leakage current is less than 1 mA
Output to shell	500	V _{AC}	60s, T _c =25℃, The leakage current is less than 1 mA
Insulation resistance			
Enter to output	200	MΩ	T _c =25℃, 500V _{DC} test
Input into the shell	200	MΩ	T _c =25℃, 500V _{DC} test
Output to shell	200	MΩ	T _c =25℃, 500V _{DC} test

Structural Drawings

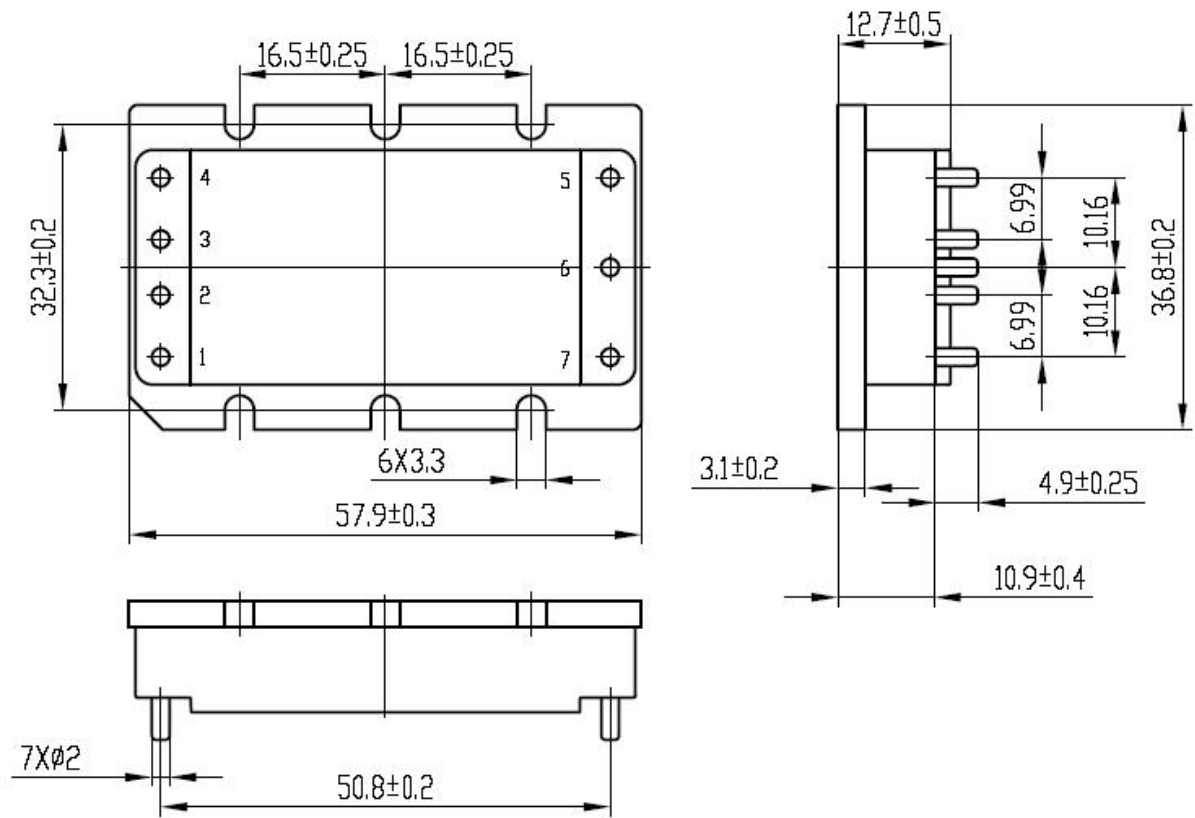

Pipe Foot Definition

Pin	Symbol	Function	Pin	Symbol	Function
1	+IN	Enter the positive end	5	-OUT	Output the negative end
2	PC	The original edge control end	6	SC	Secondary control end
3	PR	Parallel end	7	+OUT	Output the positive end
4	-IN	Enter the negative end			



CHEWINS Beijing Science & Technology Co., Ltd.

Address: No. 25, Torch South Street, Zhuozhou Development Zone, Hebei Province, People's Republic of China

Tel: 86-10-68817997 Mobile phone: 15600309099

E-mail: saleslyf@chewins.net

www.chewins.net